




RF 24-240 f/4-6.3 IS USM

- 10x zoom lens that is compact and lightweight.
- Powerful Image Stabilisation for still image and movie shooting.
- Focusing/Control selector switch allows you to use the control ring for both focusing functions and control ring functions.
- Nano USM allows high-speed yet quiet and smooth AF, as well as movie-shooting capability.
- Compatible with R series cameras.



no one sees it like you

Canon

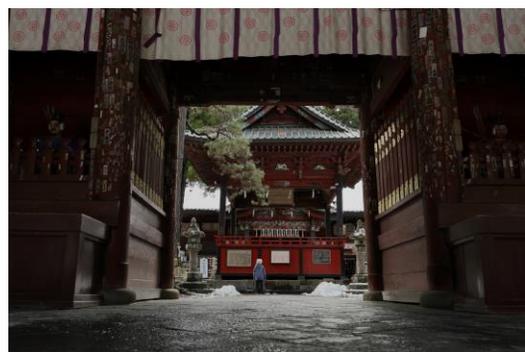

TECHNICAL SPECIFICATIONS

RF 24-240 f/4-6.3 IS USM	
Mount	RF
Focal length	24-240 mm
Maximum aperture	f/4.0 - 6.3
Minimum aperture	f/22 - 36
Minimum focusing distance	0.5 – 0.78 m
Maximum magnification	0.26 x
Lens construction	21 elements in 15 groups
Aspherical lens	1
Special low dispersion glass	2 UD
Special glass material	No
Special coating	No
Dust resistance, water resistance	No
Aperture blades	7 (circular)
IS (CIPA standard correction effect)	5 stops
Focus Drive System	NANO USM
Filter diameter	φ72 mm
Maximum diameter and length	80.4 mm x 122.5 mm
Weight	Approx. 750 g



ACCESSORIES



Lens cap
E-72II



Lens hood
EW-78F



Lens pouch
LP-1219

For more information visit
canon.com.au
canon.co.nz

no one sees it like you

Canon